
# 4-2170785-5 - ACTIVE

# zQSFP+/QSFP28 TE Internal #: 4-2170785-5 QSFP, QSFP+ & zQSPF+, Cage Assembly, 1 x 4, Elastomeric Gasket, Included Lightpipe, Standard, Data Rate (Max) 28 Gb/s, 4 Port, zQSFP+/QSFP28

### View on TE.com >

Connectors > Pluggable IO Connectors & Cages > QSFP, QSFP+ & zQSPF+

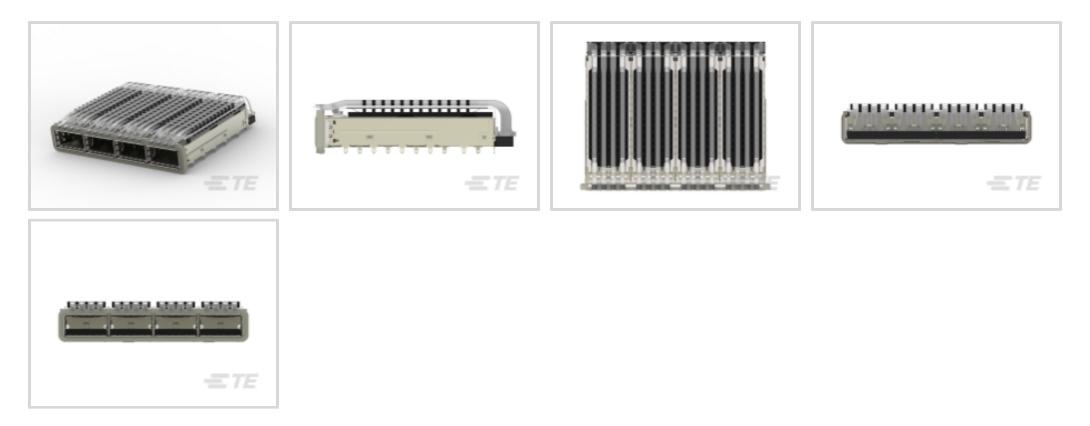

Pluggable I/O Product Type: Cage Assembly
Port Matrix Configuration: 1 x 4
EMI Containment Feature Type: Elastomeric Gasket
Thermal Accessory Type Included: Heat Sink
Included Lightpipe: Yes

# Features



### Product Type Features

Form Factor	QSFP28/56
Cage Type	Ganged
Pluggable I/O Product Type	Cage Assembly
Thermal Accessory Type Included	Heat Sink
Connector System	Cable-to-Board
Sealable	Yes
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Port Matrix Configuration	1 × 4
Number of Ports	4
Lightpipe Configuration	Quad Round
Number of Rear EONs per Port Column	0
Electrical Characteristics	
Data Rate (Max)	28 Gb/s

**C** For support call+1 800 522 6752

QSFP, QSFP+ & zQSPF+, Cage Assembly, 1 x 4, Elastomeric Gasket, Included Lightpipe, Standard, Data Rate (Max) 28 Gb/s, 4 Port, zQSFP+/QSFP28



# **Body Features**

Heat Sink Finish	Anodized Black
Heat Sink Style	Pin
Heat Sink Height Class	SAN
Heat Sink Height	6.5 mm[.256 in]
Contact Features	
PCB Contact Termination Area Plating Material	Tin
Termination Features	
Termination Post & Tail Length	2.05 mm[.081 in]
Termination Method to Printed Circuit Board	Through Hole - Press-Fit
Mechanical Attachment	
Connector Mounting Type	Board Mount
Housing Features	
Cage Material	Nickel Silver
Dimensions	
PCB Thickness (Recommended)	1.57 mm[.062 in]

# Usage Conditions

Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
Operation/Application	
For Use With Pluggable I/O Products	QSFP28 Cable Assembly, QSFP28 MSA Compatible Transceiver
Pluggable I/O Applications	SFP+ Stacked Belly-to-Belly
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Method	Box & Tray
Other	
EMI Containment Feature Type	Elastomeric Gasket
Included Lightpipe	Yes
Enhancements	Standard

**C** For support call+1 800 522 6752

QSFP, QSFP+ & zQSPF+, Cage Assembly, 1 x 4, Elastomeric Gasket, Included Lightpipe, Standard, Data Rate (Max) 28 Gb/s, 4 Port, zQSFP+/QSFP28



# Product Compliance

### For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUN 2015 (163) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.

### Solder Process Capability

Not applicable for solder process capability

### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked.Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

# Image: constraint of the systemImage: cons

# **Compatible Parts**

QSFP, QSFP+ & zQSPF+, Cage Assembly, 1 x 4, Elastomeric Gasket, Included Lightpipe, Standard, Data Rate (Max) 28 Gb/s, 4 Port, zQSFP+/QSFP28



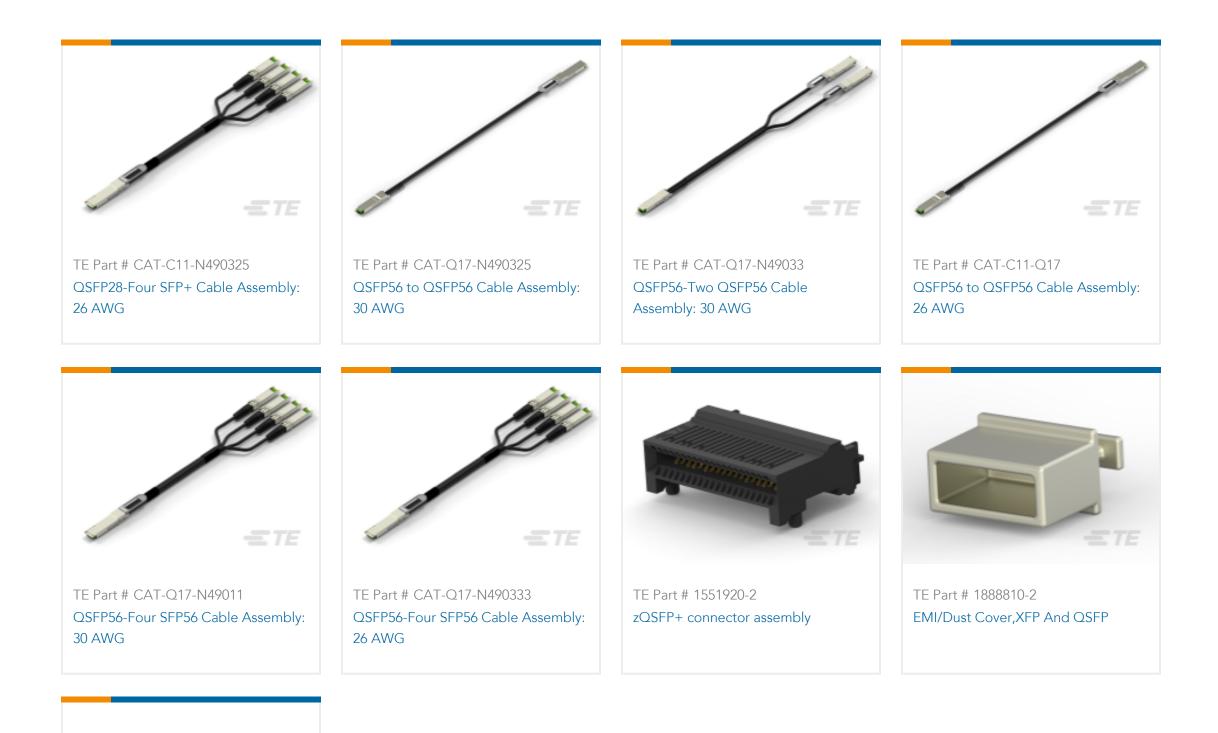

TE Part # 1-2215047-0 ASSY, STG TL, QSFP28 LP,1X4

# Also in the Series | zQSFP+/QSFP28



# Documents

3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_4-2170785-5\_A.2d\_dxf.zip English Customer View Model ENG\_CVM\_CVM\_4-2170785-5\_A.3d\_igs.zip

**C** For support call+1 800 522 6752

QSFP, QSFP+ & zQSPF+, Cage Assembly, 1 x 4, Elastomeric Gasket, Included Lightpipe, Standard, Data Rate (Max) 28 Gb/s, 4 Port, zQSFP+/QSFP28



English

Customer View Model ENG\_CVM\_CVM\_4-2170785-5\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

## Datasheets & Catalog Pages QSFP28/56 and zQSFP+ Interconnects

English

Product Specifications Application Specification

English

Instruction Sheets Instruction Sheet (U.S.) English